

FIRST IN WEIGHT DISTRIBUTION



Reese® Strait-Line™ Hitch & Dual Cam High Performance Sway Control

The ultimate hitch in detail and design. The Strait-Line Hitch consists of our patented Dual Cam High-Performance Sway Control and our High-Performance Weight Distributing System in one easy-to-install package.

- Pro-active design forces the trailer to stay in a straight line behind your tow vehicle.
- The stronger the sway force, the more the Dual Cam HP works to stop it.
- Simple installation and adjustment
- Fully automatic and self-centering
- Rated up to 1,700 lbs. TW and 17,000 lbs. GTW
- Limited lifetime warranty



Reese SC Sway Control Hitch Kits

This system offers the functionality of a weight distribution system with friction sway control built in.

- Tapered bars provide superior weight distribution performance over a variety of uneven road and weather conditions
- Integrated friction sway control provides consistent control
- Rated up to 1,500 lbs. TW and 15,000 lbs. GTW
- Limited lifetime warranty



Reese Weight Distribution Round Bar Style

The Round Bar Weight Distributing Hitch features easy-to-use adjusting blocks for easier and faster ball mount angle adjustment.

- One-piece cast head, snap-up brackets & chains
- Adjusting washers for head adjustment
- Rated up to 1,200 lbs. TW and 12,000 lbs. GTW
- Limited lifetime warranty



Reese Weight Distribution Trunnion Style

Reese® has combined the best of the features from all of our weight distributing kits to create the High-Performance Trunnion Kit.

- Raised ball platform

- Serrated washers for head adjustment
- Forged ball platform and spring bar mounts
- Rated up to 1,700 lbs. TW and 17,000 lbs. GTW
- Limited lifetime warranty




TO DETERMINE THE CORRECT WEIGHT DISTRIBUTING HITCH:

1. Determine the tongue weight of your trailer
2. Estimate the vehicle cargo load
3. Match the sum of these weights to the proper Reese® hitch.

HITCH WEIGHT = TONGUE WEIGHT + VEHICLE CARGO LOAD BEHIND REAR AXLE

Tongue weight includes the trailer tongue weight with full gas, water and waste systems and everything packed inside the trailer. Vehicle cargo includes all materials carried in your tow vehicle, such as boat motors, gas cans, tools, etc.

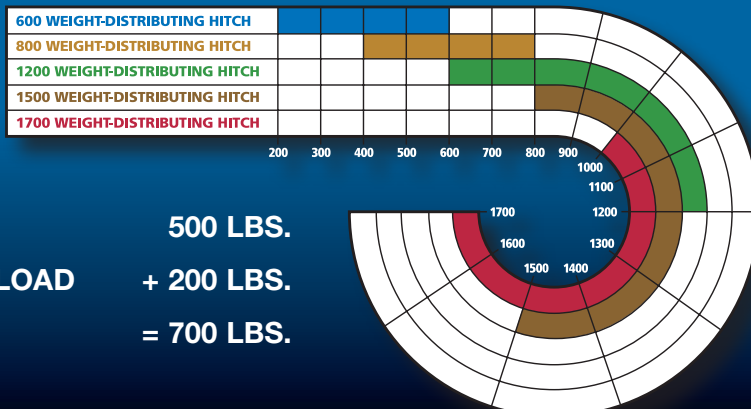

EXAMPLE:

TONGUE WEIGHT **500 LBS.**
PLUS VEHICLE CARGO LOAD **+ 200 LBS.**
TOTAL HITCH WEIGHT **= 700 LBS.**

USING THE SELECTOR SHOWN ABOVE, AN 800 WEIGHT-DISTRIBUTING HITCH IS ADEQUATE.